

Simulation and Modelling of a Savonius Vertical Axis Wind Turbine Using ANSYS

MD Salman¹, Prof. Daksheeswara Reddy Chamala²

¹PG Student, Mechanical Engineering, Mallareddy college of engineering & Technology, India

²Asst. Professor, Mechanical Engineering, Mallareddy College of Engineering & Technology, India

Received 02 November 2025; Accepted 11 November 2025


Abstract

The demand for renewable energy has led to significant advancements in wind turbine design. This paper focuses on the design, simulation, and analysis of a Savonius Vertical Axis Wind Turbine (VAWT) using SolidWorks and ANSYS. The turbine was analyzed for various mechanical and aerodynamic properties to evaluate its performance under low wind speeds suitable for residential and rural applications. The study includes simulation results such as stress, strain, and deformation analysis. Results indicate that the turbine achieves stable and efficient energy output at low wind speeds, confirming its potential for small-scale power generation.

Keywords — Savonius Turbine, Wind Energy, ANSYS, Simulation, Sustainable Energy

I. INTRODUCTION

With the increasing global emphasis on renewable energy, the development of small-scale wind turbines has become crucial. The Savonius Vertical Axis Wind Turbine (VAWT) offers advantages such as simple design, low noise, and the ability to operate effectively under low wind speeds and in all wind directions. This paper presents a detailed design and analysis of a Savonius turbine optimized for small-scale energy generation using ANSYS simulation tools.



II. LITERATURE SURVEY

Several studies have been carried out to improve the efficiency of Vertical Axis Wind Turbines (VAWTs). M. Islam et al. (2008) presented aerodynamic models for Darrieus-type turbines, while S. Mertens (2006) analyzed wind concentration effects in building-integrated turbines. Savonius turbines, being drag-based, are known for self-starting ability and high torque at low wind speeds. Optimizations such as blade curvature, overlap ratio, and use of composite materials have been shown to enhance power output and durability.

III. PROCEDURE / METHODOLOGY

The design and simulation of the Savonius turbine were carried out using SolidWorks and ANSYS. The process included:

1. Creation of 3D geometry of blades and rotor assembly.
2. Meshing and material property assignment in ANSYS.
3. Application of boundary conditions and wind load.
4. Structural analysis for stress, strain, and deformation.
5. Performance evaluation and validation with theoretical data.

IV. ANALYSIS AND RESULTS


The turbine model was analyzed under realistic wind conditions using ANSYS Workbench. Below are placeholders for the results obtained from simulation analysis, including meshing, stress, deformation, and strain plots.



Meshed Model of Savonius Turbine , Total Deformation Contour , Directional Deformation (X-Axis)




Equivalent Elastic Strain Distribution, Equivalent Stress (von-Mises) Distribution ,

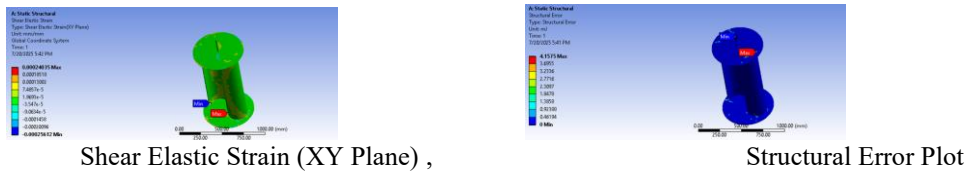

Shear Elastic Strain (XY Plane) ,

Structural Error Plot

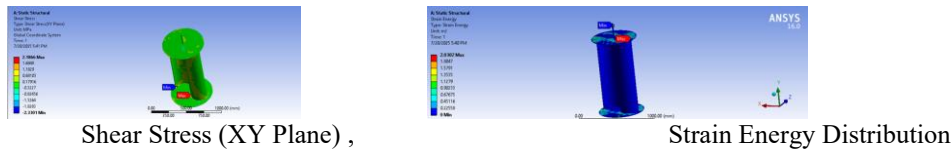

Shear Stress (XY Plane) ,

Strain Energy Distribution

Table 1. Performance Parameters of Savonius Turbine

Parameter	Value	Unit
Air Density (ρ)	1.225	kg/m ³
Wind Speed	5	m/s
Mechanical Power	3.55	W
Voltage	7.64	V
Current	0.37	A
Efficiency	29	%

Table 2. ANSYS Structural and Mechanical Analysis Results

Parameter	Maximum Value	Unit
Equivalent Stress	18.873	MPa
Total Deformation	4.339×10^{-5}	mm
Equivalent Elastic Strain	0.00081519	mm/mm
Shear Elastic Strain	0.00024035	mm/mm
Shear Stress	2.1866	MPa
Strain Energy	2.302	mJ

V. CONCLUSION

The Savonius Vertical Axis Wind Turbine was successfully designed and analyzed. The ANSYS simulations confirmed that the structure can withstand applied stresses and deformations under low wind speed conditions. The design proved efficient for residential and small-scale renewable energy applications.

VI. FUTURE SCOPE

Further enhancements can be made by exploring advanced composite materials for lighter and stronger blades. Hybrid configurations combining Savonius and Darrieus concepts may improve efficiency. Additionally, future research can involve detailed CFD studies to optimize turbine aerodynamics.

REFERENCES

- [1]. M. Islam, D. S.-K. Ting, and A. Fartaj, 'Aerodynamic models for Darrieus-type straight-bladed vertical axis wind turbines,' *Renewable and Sustainable Energy Reviews*, 2008.
- [2]. S. Mertens, 'Wind Energy in the Built Environment: Concentrator Effects of Buildings,' Earthscan, 2006.
- [3]. M. Ragheb and A. M. Ragheb, 'Wind Turbines Theory - The Betz Equation and Optimal Rotor Tip Speed Ratio,' IntechOpen, 2011.
- [4]. A. H. Lefebvre, 'Energy Production Using Vertical Axis Wind Turbines,' *Journal of Wind Engineering*, 2019.